





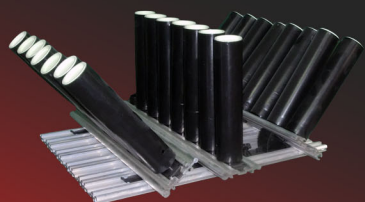
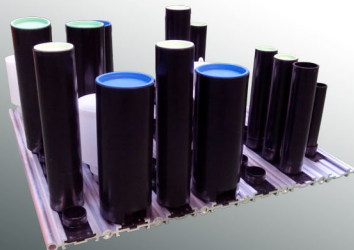
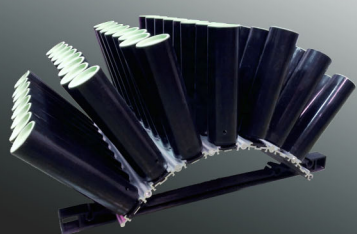


Plásticos Gamón, s.a.

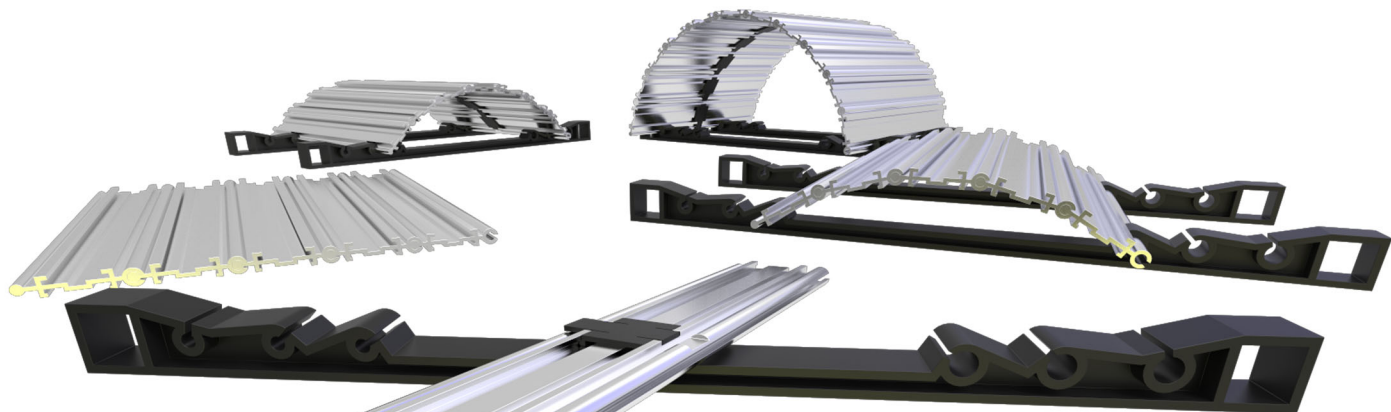


A world of possibilities...

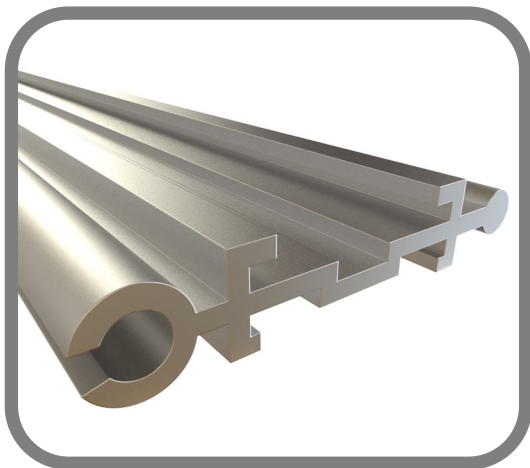


Aluminum Profile W38:




W=38mm A=15° Length 450mm - Ref: 39145 W38 A15

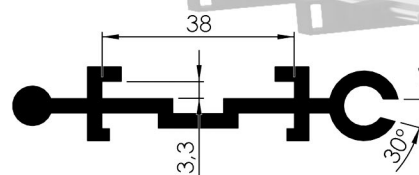


W=38mm A=30° Length 550mm - Ref: 39155 W38 A30

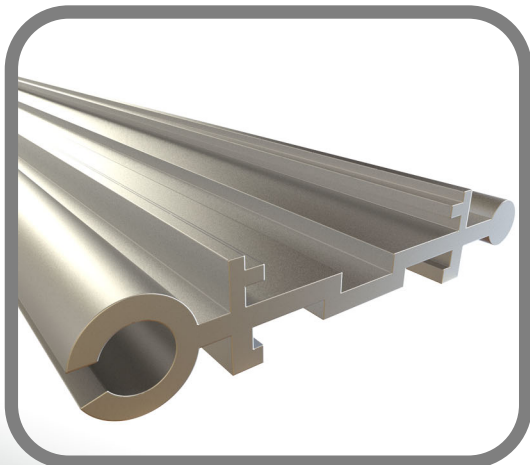


Aluminum Profile W40:

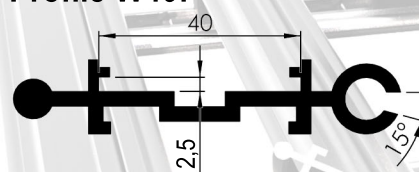

W=40mm A=15° Length 450mm - Ref: 39145 W40 A15

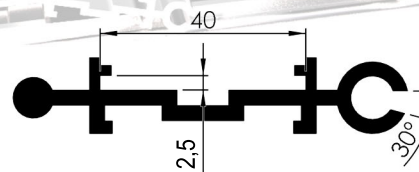

W=40mm A=30° Length 550mm - Ref: 39155 W40 A30

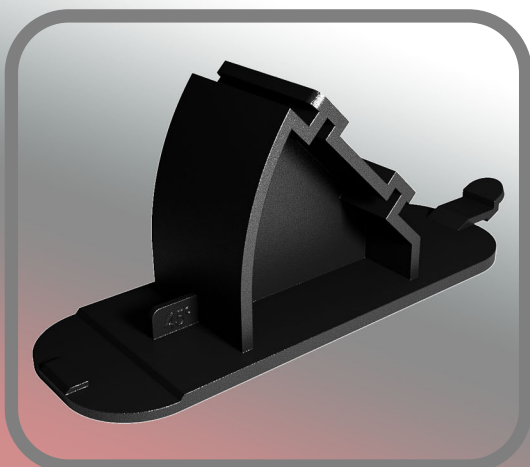

Angles for flat set up:

A= 0° - Ref: 39100 90V

A=40° - Ref: 39140 50V

A=10° - Ref: 39110 80V

A=45° - Ref: 39145 45V

A=15° - Ref: 39115 75V

A=50° - Ref: 39150 40V



A=20° - Ref: 39120 70V

A=60° - Ref: 39160 30V

A=30° - Ref: 39130 60V

A=70° - Ref: 39170 20V

A=80° - Ref: 39180 10V

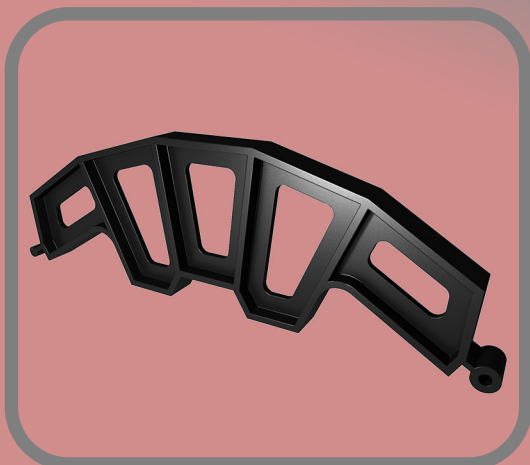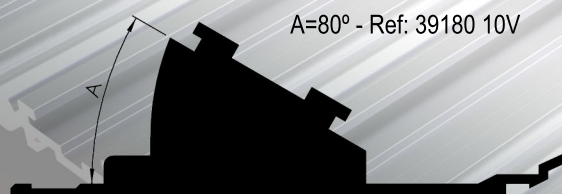

Reinforcements for big calibers:





For 7 elements - Ref: 39107 R



For 9 elements - Ref: 39109 R

Supporting ribs:

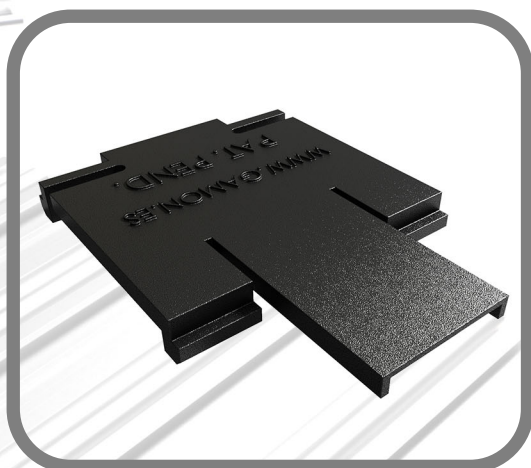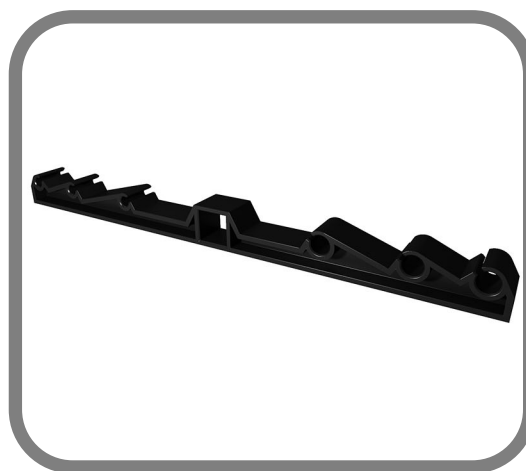

Locking device:

Installed at the bottom of each profile, it prevents slippage between them.

Locking device - Ref: 39100 PE



Stopper:

Very useful for retaining the angles in place. Compatible with both profile wides.

Stopper: - Ref: 39101



X Holder:


Being compatible with both profile wides, is used to attach to them the single-shots by means of a cable tie. X Holder - Ref: 3900 X



Tube holder for Angles:

Attached directly to the angles, allow us to make really versatile 360° set-ups.


Angle Holder - Ref: 3900 V

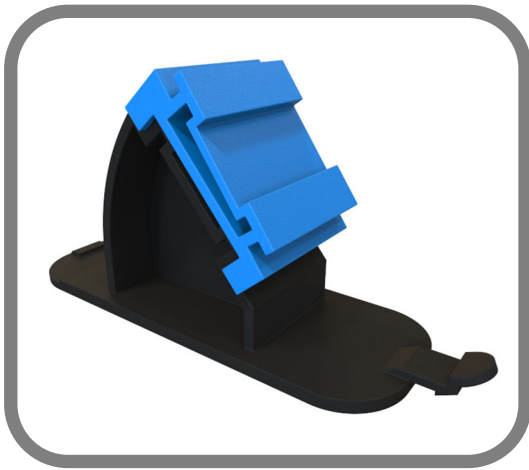

Supplement of 5° for the angles:

It allows you to create new angles by adding it to a normalized angle. Now you can create steps of 5° like , 0°, 0°+5°, 10°, 10°+5°, 20° ...

COMING SOON!

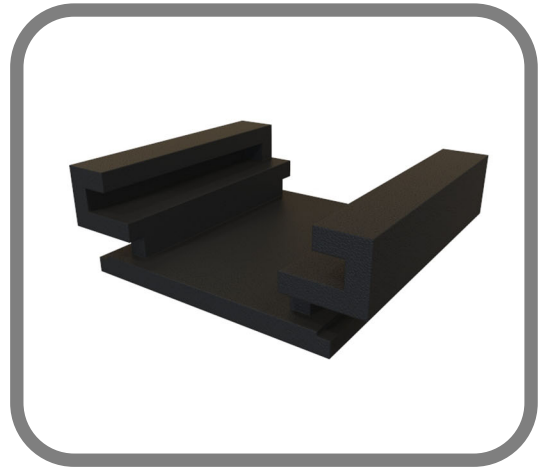

Adaptor for 40x40x3mm bases:

With this new adaptor you can attach also the singleshots with bases of 40x40x3mm to both widths of the aluminium profiles.

Ref: 39102